POROUS CERAMIC PROBE

www.cnhighborn.com

邮箱 Email:evelyn@cnhighborn.com

电话 Tel：86-518-81060600/11/22/55

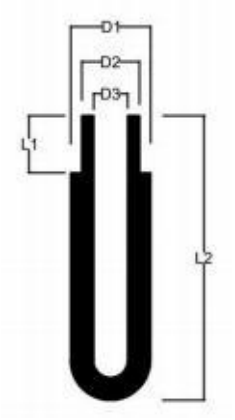
whatsapp/微信 wechat：86-13951255589

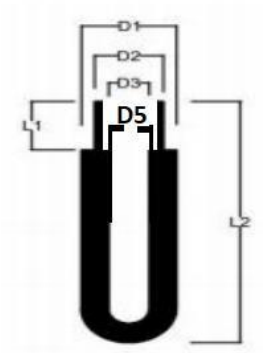
地址：中国江苏省连云港市海州区朝阳东路 21 号东盛名都广场 A 座 9 楼


Address: 9F,Bldg.A Dongshengmingdu Plaza,No.21 Chaoyang East Road, Haizhou District,Lianyungang,Jiangsu,China

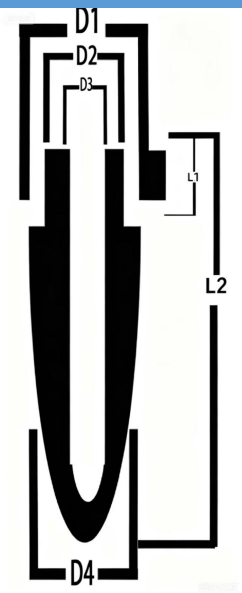
1. 工厂陶土头现有规格

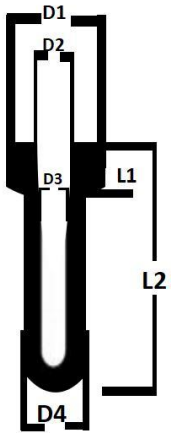
Available Specifications of Factory Porous Ceramic Probe

图纸/DRAWING	D1	D2	D3	L1	L2	气孔率 Porosity
	14.7	10	6.3	15.8	74.5	35%
	18.7	13.7	9.6	15.7	72.3	35%
	20.6	15.7	9.8	21.6	84	35%
	20.7	18.5	13.2	16.5	85	35%
	21.3	14.2	9.6	15.4	76	35%
	21.3	15.3	9.6	15.4	76	35%
	21.3	15.8	9.6	15.4	76	35%
	21.3	16.3	9.6	15.4	76	35%
	33.4	27	17	17	104	35%
	51	47	33	15	102	35%
	65	59	54.5	15.2	90.5	35%

图纸/DRAWING	D1	D2	D3	D5	L1	L2	气孔率 Porosity
	40	35	30	25	21	75	35%

图纸/DRAWING	A	B	C	D	L1	L2	气孔率 Porosity
	16	13/16	10.5	7.5	0	59	35%

图纸/DRAWING	D1	D2	D3	D4	L1	L2	气孔率 Porosity
	20.0	15.0	9.0	17.0	20.0	80.0	35%




图纸/DRAWING	D1	D2	D3	D4	L1	L2	气孔率 Porosity
	23.0	12.5	11.0	16.8	6.6	71.0	35%

以上陶土头规格为工厂现有规格，未列规格可以根据客户要求尺寸以及气孔率(5-70%)进行开模定制，主要材料氧化铝，硅藻土，碳化硅可以选择。

The above specifications for porous ceramic probe represent the factory's standard offerings.Unlisted specifications can be custom molded according to customer-specified dimensions and porosity(5%-70%).Available primary materials include alumina,diatomite,and silicon carbide.

2. 产品及组合方式

Products and Combination Methods

序号 (NO.)	产品及组合方式 products and combination methods	实物图片 Actual Images
1	陶土头 Porous ceramic probe	
2	陶土头+螺纹尼龙件 Porous ceramic probe+Thread Nylon Parts	
3	陶土头+内螺纹尼龙头+宝塔头 Porous ceramic probe+Female threaded nylon head + pagoda head	
4	陶土头+UPVC 管（长度可以定制） Porous ceramics probe+UPVC pipe (length can be customized)	
5	陶土头+UPVC 管（长度可以定制)+三通 Porous ceramic probe+UPVC pipe (length can be customized)+tee joint	
6	陶土头+UPVC 管（长度可以定制)+三通+胶塞 Porous ceramics probe+UPVC pipe (length can be customized)+tee+rubber plug	

7	陶土头+UPVC 管（长度可以定制)+三通+螺纹塞 Porous ceramic probe+UPVC pipe (length can be customized)+tee joint+threaded plug	
8	陶土头+UPVC 管（长度可以定制)+三通+胶塞+真空表接头+真空表(可以选择正压表，负压表) Porous ceramic probe+UPVC pipe (length can be customized)+tee+rubber plug+Vacuum gauge connector + vacuum gauge (positive pressure gauge or negative pressure gauge available)	
9	陶土头+UPVC 管（长度可以定制)+三通+螺纹塞(规格可以定制:常用 m18、m16、m14、m12)+真空表接头+真空表(可以选择正压表，负压表) Porous ceramic probe+UPVC pipe (length can be customized)+tee joint+threaded plug(Specifications can be customized; common types: M18, M16, M14, M12)+Vacuum gauge adapter + Vacuum gauge (positive or negative pressure gauge optional)	

注：工厂库存标准 UPVC 管外径 20mm、内径 15mm/UPVC 三通为同径正三通，内孔为 20mm，其余配件均基于该尺寸进行配套，如客户所需尺寸非库存标准尺寸可以定制。

Note: The factory's standard UPVC pipe in stock has an outer diameter of 20 mm and inner diameter of 15 mm. The UPVC tee is an equal straight tee with an inner bore of 20 mm. All other fittings are matched to this size. Customization is available for non-standard dimensions as required by customers.